



270W PV Module Polycrystalline Panels IP65 Crystalline Pv Modules 2400Pa Windproof

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Linksun
- Certification: CE
- Model Number: LS-270P
- Minimum Order Quantity: 100PCS
- Packaging Details: 1pcs/carton
- Delivery Time: 5-8days
- Payment Terms: 30% TT in advance, 70% balance before delivery.
- Supply Ability: 1000pieces per week



Product Specification

- Connector: MC4
- Frame: Anodized Aluminum Alloy
- Junction Box: IP65
- Lifespan: 25 Years
- Material: Polycrystalline
- Power: 270W
- Size: 1640*992*35mm
- Temperature Range: -40 ~+85
- Weight: 21kg
- Highlight: **270W polycrystalline panels,
PV Module polycrystalline panels,
IP65 crystalline pv modules**

for more products please visit us on monosolarpanel.com

270W PV Module Polycrystalline Panels IP65 Crystalline Pv Modules 2400Pa Windproof

This 270W polycrystalline PV module, with an IP65 rating, is designed for high efficiency and durability. It withstands wind pressures up to 2400Pa, making it ideal for various weather conditions. Perfect for residential and commercial installations, these crystalline PV panels ensure reliable energy output and long-term performance. Suitable for those looking to reduce energy costs and environmental impact, this module provides a sustainable and cost-effective solar power solution. Its robust construction ensures reliable power generation in diverse environments.

Product Features:

1)Durable&Sturdy

The product contains anodized aluminum alloy frame. It can work in the temperature between -40 ~85 and withstand the high winds (2400Pa) and snow loads (5400Pa).

2)Wide application


Common applications includes RV, camper, car, marine, residential rooftop, remote farm, traffic signs, etc.

3)eco-friendly

It uses polycrystalline solar cells. A poly crystalline solar panel is economical, eco-friendly, consumes less energy, and can function in all temperatures.

Product Details:

Model	LS-270P
Maximum Power(Pmax)	270W
Maximum Power Voltage(Vmp)	29.8V
Maximum Power Current(Imp)	9.02A
Open Circuit Voltage(Voc)	35.8V
Short Circuit Current(Isc)	9.92A
Power Tolerance(Positive)	3%
Cell Type	Poly-crystalline
Contract Dimensions(mm)	1640*992*35mm
Weight(KGS)	21kg
Protection Class	IP65
Maximum System Voltage	1000V
Temperature Range	-40 ~85
Module Efficiency STC	16.56%
Cell number	60(6x10)
Front Glass	3.2mm High Transmission Tempered Glass
Frame Type	Anodized Aluminum Alloy
Connector Type	MC4
Output Cables	4 mm ² , Length:900mm

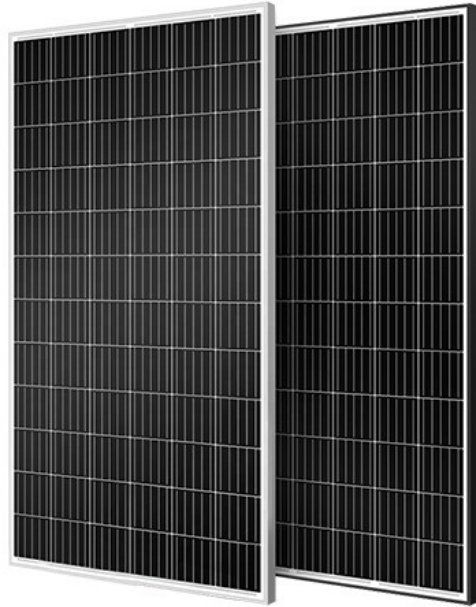

FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty.If you have any questions about our quality during use,you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao,Ningbo.Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China