




340w 37.5V Black Solar PV Panels Polycrystalline Solar Panels

Our Product Introduction

for more products please visit us on monosolarpanel.com

Basic Information

- Place of Origin: China
- Brand Name: Linksun
- Certification: CE
- Model Number: LS-340P
- Minimum Order Quantity: 100PCS
- Packaging Details: 1pcs/carton
- Delivery Time: 5-8days
- Payment Terms: 30% TT in advance, 70% balance before delivery.
- Supply Ability: 1000pieces per week

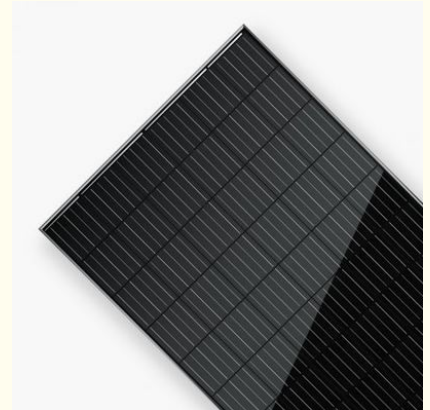

Product Specification

- Connector Type: MC4
- Efficiency: 17.25%
- Power: 340W
- Product Name: 340W Black Solar PV Panel
- Size: 1950*992*40mm
- Temperature Range: -40 ~+85
- Warranty: 25 Years
- Weight: 23kg
- Highlight: 340w Black Solar PV Panels,
37.5V Black Solar PV Panels,
340 watt polycrystalline solar panels

Product Description

Linksun 340w Black Polycrystalline solar panels

The 340W 37.5V Black Solar PV Panels with Polycrystalline cells offer high efficiency and a sleek design. Ideal for residential and commercial installations, these panels deliver reliable performance even in low-light conditions. The all-black aesthetic enhances visual appeal, blending seamlessly with modern architecture. Built to last, they ensure long-term durability and require minimal maintenance. Perfect for eco-conscious users, these panels help reduce electricity costs and carbon footprint, providing a sustainable and efficient energy solution for various applications.

Product Features:

1)Widely Use

Ideal for RVs, small houses, ships, household power supplies, commercial buildings, and more. It helps save electricity consumption and will save you more in the future.

2)Reliable and Durable

Corrosion-resistant aluminum frame provides extended outdoor use that ensures the panel can last for decades.

3)Low production cost

The production cost of monocrystalline silicon solar cells is relatively low, and the technology is already very mature, so it has been widely used.

Product Details:

Model	LS-340P
Maximum Power(Pmax)	340W
Maximum Power Voltage(Vmp)	37.5V
Maximum Power Current(Imp)	9.65A
Open Circuit Voltage(Voc)	46.35V
Short Circuit Current(Isc)	9.85A
Power Tolerance(Positive)	3%
Cell Type	Poly-crystalline
Contract Dimensions(mm)	1950*992*40mm
Weight(KGS)	23kg
Protection Class	IP65
Maximum System Voltage	1000V
Temperature Range	-40 ~85
Module Efficiency STC	17.25%
Cell number	72(6x12)
Front Glass	3.2mm High Transmission Tempered Glass
Frame Type	Anodized Aluminum Alloy
Connector Type	MC4
Output Cables	4 mm ² ,Length:900mm



FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty.If you have any questions about our quality during use,you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao,Ningbo.Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China